

Research Article

Deacidification of *Camelina sativa L.* seed oil by Physisorption method and characterization of produced biodiesel

Rakshit Pathak*

Department of Chemistry, D. S. B. Campus, Kumaun University, Nainital-26300 (Uttarakhand), India

Kritika Guleria

Defence Institute of Bio-Energy Research (DRDO), Haldwani, Nainital- 263139 (Uttarakhand), India.

Anjali Kumari

Defence Institute of Bio-Energy Research (DRDO), Haldwani, Nainital- 263139 (Uttarakhand), India.

Satya Pal Singh Mehta

Department of Chemistry, D. S. B. Campus, Kumaun University, Nainital-26300 (Uttarakhand), India

*Corresponding author. Email: rakshitpathak325@gmail.com

Article Info

<https://doi.org/10.31018/jans.v13i1.2555>

Received: February 5, 2021

Revised: March 7, 2021

Accepted: March 11, 2021

How to Cite

Pathak, R. *et al.* (2021). Deacidification of *Camelina sativa L.* seed oil by Physisorption method and characterization of produced biodiesel. *Journal of Applied and Natural Science*, 13(1): 287 - 294. <https://doi.org/10.31018/jans.v13i1.2555>

Abstract

According to India's National Biofuel Policy, only non-edible oilseed crops can be used for the biofuel feedstock. In this context, *Camelina sativa* is one such plant that fulfils all the criteria defined by the Biofuel policies of India. So, the present investigation was aimed to examine *C. sativa* seed oil capabilities as a biodiesel feedstock. Oil was deacidified via adsorption method applying Silica Gel as an adsorbent. The highest efficacy was obtained when 1:9 (Silica gel: oil) ratio was applied and the acid value was reduced from 6.45 to 2.78 mg KOH/g. Furthermore, oil was transesterified using methanol in the ratio of 1:6 (oil: methanol molar ratio) and 0.8 % (w/w of oil) of KOH as a catalyst at 70 °C. The produced biodiesel was analyzed in terms of fuel-specific parameters and results were compared with American Society for Testing and Materials (ASTM) standards. The results were very much satisfactory and under the limits specified by the ASTM standards. The results revealed that oil to biodiesel conversion was 92.28 % with an acid value of 0.37 mg KOH/g. The measured Iodine value was 152 g_l/100g indicated the high unsaturation. Still, Camelina biodiesel showed oxidation stability of 6 h., which was a decent value compared to this much unsaturation. The sulphur content was also higher (24 ppm) than the specified limit (15 ppm). Besides, the fuel-specific parameters like sulphur content and iodine value were under the ASTM limits.

Keywords: Acid value, Biodiesel, *Camelina sativa*, Silica gel, Transesterification

INTRODUCTION

The fuel sector is the backbone of modern civilization and therefore, extensive research is going on everywhere in the world to ensure the availability of fuels for industries and transportation. As an emerging country, India is also a very big consumer of petroleum products and fulfils its own energy demand by importing crude oil from other countries (Dalei, 2017; Sbista 2020). This dependency is often reduced by developing alternative fuel sources that should be cost-effective and environment friendly. In this context, biodiesel is grasping all

the scientific community's attention to overcome such scarcity of petroleum products. There is number of biomass utilized as a feedstock for biodiesel production, e.g. vegetable oils, creature fats, algae, cyanobacteria, waste cooking oil and some non-edible raw materials (Pinzi, 2014; Mamat et al., 2019).

According to India's National Biofuel policy, only non-edible oil plants should be preferred for biodiesel production (Biofuel Policy, 2018). Considering this policy, the present study was focused on evaluating the biodiesel capabilities of a renowned non-edible oilseed crop *Camelina sativa L.* in Indian climatic conditions.

Camelina sativa (Fig. 1) is a dicotyledonous, terrestrial oil seeded species of the *Brassicaceae* family that originated in Germany about 600 B.C. and later widened to central Europe and south west of Asia (Berti et al., 2016). It is a short season annual crop with anchoring roots; plants are tall and range up to height 80-90 cm., leaves are smooth or with few hairs and without having petioles and attached with the stems in an alternate manner (Richard, 2011). One of the major qualities of *Camelina* is that it easily adapts to any climatic conditions and environment. In addition to this, the plant needs less amount of water, manure and pesticides and contains oil yield from the range 32-38 % (Kumar and Pathak, 2016). However, *Camelina* seed oil yield and its fatty acid composition are largely varied in different environmental conditions (Murphy, 2016). The study was also interesting as in India; biodiesel study is so far focused on *Jatropha curcas*; a high oil yielding perennial plant from the family *Euphorbiaceae* (Pandey et al., 2012). Except for the Defence Institute of Bio-Energy Research (DIBER) laboratory, *Camelina* oil-related research work has not been given much importance to date in India. Hence, in the present investigation, efforts were attempted to evaluate the ester-specific and fuel-specific biodiesel characteristics produced from *Camelina* seed oil. It is also important to mention here that for the refining of *Camelina* oil first time, Silica Gel (SG) was used as a deacidifying agent. The efforts were also made to analyze the efficacy of silica gel for removing free fatty acids from the *Camelina* oil.

MATERIALS AND METHODS

The present investigation was carried out at the Defence Institute of Bio Energy Research, Haldwani, Uttarakhand, in India. *Camelina sativa* cv. Calena (EC643910) were collected from DIBER field Station, Haldwani, Uttarakhand (29.22°N 79.52°E) and were dried for 2 days in a hot air oven. Seeds were ground into fine particles for the oil estimation. All the chemicals required for the experiments were analytical grade (AR) procured from the local vendor and used without further purification.

Oil estimation

Camelina seed oil was obtained using mechanical expeller followed by the solvent extraction method via Soxhlet apparatus using hexane as a non-polar solvent. Excess of solvent was removed using Rota-evaporator, the oil was accurately weighed and the acid value was estimated prior to the deacidification process.

Deacidification of oil

Blue crystalline silica gel was used for deacidification based on its adsorption capability of the moisture

(Christy, 2012; Wang et al., 2014). Prior to the use, Silica Gel (SG) was activated in hot air oven at 120 °C and grounded into a fine powder using a mixture grinder. 1000 mL of a glass beaker was used for the adsorption phenomena. Oil was mixed with hexane in a ratio of 10:1 (g/g) to reduce the viscosity of the oil by which it can react easily with the SG. SG was poured into this mixture in four different SG ratio to oil ratio (1:3, 1:6, 1:9 and 1:12) and stirred (900 rpm) on a magnetic stirrer for 1 h. Finally, SG was settled down and the oil mixture was decanted and filtered using Whatman filter paper. The entire process was repeated three times and was compared based on oil percentage, acid value (AV), free fatty acid value (% FFA) and density.

Oil conversion to biodiesel

500 g of refined oil was poured into a round bottom flask and preheated at 60 °C using water bath prior to the TE reaction. TE reaction was done with methanol to oil molar ratio 6:1 {103.29 g of Methanol (calculated theoretically using average molar mass of the oil)}, 4 g (0.8% w/w of oil) of KOH was added to the mixture and heated at 70 °C for 1 hr. followed by the continuous stirring (400 rpm) using magnetic stirrer. Presuming the completion of reaction, the reaction mixture was transferred into the separating funnel and allowed to settle overnight into two different layers. The bottom layer of glycerol was separated from the upper layer of produced biodiesel, followed by the washing with DW to remove water-soluble impurities. Yield conversion was calculated by the following formula:

$$\text{BD Yield (in \%)} = \frac{\text{Weight of obtained biodiesel}}{\text{Weight of oil used for TE}} \times 100 \quad (1)$$

Characterization of produced biodiesel

TLC of the oil and produced biodiesel was done by using CAMAG HPTLC (Make: Switzerland), oil samples were dissolved in methanol and applied on the TLC plate (60 F 254 Merck) by using syringe injector Linomat V (injecting speed: - 150 nl/sec with the help of nitrogen), the mobile solvent was Hexane: DEE: AA (8.5:1.5:0.1 v/v/v) and after complete running of solvent, plate was dried under the chamber and derivatized using iodine granules. Whole process was worked under regular laboratory conditions (Temp. 25 ± 2 °C, RH 50 ± 5%).

For determining the functional group, Fourier Transform Infrared Spectroscopy (FT IR) spectra of *Camelina* Biodiesel (CBD) was recorded on FT-IR Spectrometer (Model: Bruker Alpha II, GmbH, Make: Germany) in spectral range 4000-500 cm⁻¹. Results were evaluated using OPUS software. Gas Chromatography-Mass Spectrometry (GC-MS) profiling of CBD was also analyzed to know the Mono Unsaturated Fatty Acids

(MUFA) and Poly Unsaturated Fatty Acid (PUFA) components percentage. For this purpose, the sample was analyzed in GC MS QP-2010 model (Shimadzu, Japan) and final mass spectra were compared with the NIST14 library.

Physicochemical characterization

Transterified Camelina oil was characterized on the basis of different ester specific and fuel-specific properties. The results were compared with the limits specified by the American Society for Testing and Materials, ASTM D (2002) 6751-02.

Moisture content, sp. gravity, RI estimation

Moisture content was estimated using Halogen Moisture Analyzer (Mettler TOLEDO HE 53). Specific gravity of the samples was determined using Density/Specific Gravity Meter (DA- 130N). The Refractive Index (RI) of the samples was estimated by Refractometer (Kyoto electronics RA – 600).

Determination of acid value and FFA%

The acid value was determined using the American Oil Chemist's Society (AOCS) official method Cd 3a–63 (AOCS, 2004). 1g of the sample was dissolved in 10 mL of ethanol followed by adding 1 drop of Phenolphthalein and titrated against 0.1 N KOH solution, and endpoint occurred when the mixture colour appeared pink.

$$AV \text{ (mg KOH/g)} = \frac{56.1 \times V \times N}{W} \times 100 \quad (2)$$

$$FFA(\%) = \frac{0.282 \times V \times N}{W} \times 100 \quad (3)$$

Where, V= titre value (KOH volume), N= Normality of KOH, W= mass of oil, 0.28 = Constant value (mass of oleic acid neutralized by 1g of KOH).

Determination of saponification value (SV)

SV value was determined by the method of (Barret, 2018). Oil was precisely measured and poured into a conical flask followed by adding ethanolic KOH and the

mixture was refluxed in a water bath for 60 minutes. Complete saponification occurred and indicated by the clear appearance of the solution. Phenolphthalein was added to this mixture solution colour become pink. This mixture was titrated against 0.5N HCl, endpoint observed when pink colour completely disappeared, the blank was also titrated against 0.5N HCl. SV was calculated by the following formula: -

$$SV \text{ (mgKOH/g)} = \frac{56.1 \times (B - S) \times N}{W} \quad (4)$$

Where, B= titre value of 0.5 N HCl required for the blank, S= titre value of 0.5N HCl required for the sample, N = normality of HCl, W= Mass of the sample. From the SV, the molecular mass of the oil was also determined using the following formula:

$$MW_{oil} = \frac{3 \times 56,100}{SV} \quad (5)$$

Determination of iodine value (IV)

Iodine value was determined by the Wijs solution method (Zaliha et al., 2004). Oil samples were precisely weighed in an Iodine flask and Wijs solution was added to it in a specific amount, reaction mixture was placed into a dark chamber for 1 hour. After this, potassium iodide solution and DW was added, the resultant solution was titrated against 0.1 N sodium thiosulfate solution till the yellow colour almost became colourless. After that, 2 to 3 drops of the starch solution were added to it and again titrated till the blue colour completely disappeared. The same procedure was followed using a blank sample. The amount of sodium thiosulfate required for blank minus the amount required for the oil sample gives the value of thiosulfate equivalent of Iodine absorbed by the sample. Iodine value calculated by the formula: -

$$IV \text{ (gI}_2\text{/100g)} = \frac{N \times (B - S) \times 12.69}{W} \quad (6)$$

Where, B = titre value of thiosulfate solution for the blank, S= titre value of thiosulfate solution for the sample, N= Normality of thiosulfate solution, 12.69 = Constant {each mL of sodium thiosulfate solution is



Fig. 1. (A). Camelina Plant at DIBER, Haldwani; (B). Camelina seeds.

equivalent to 12.69 mg of available iodine (Barabas and Brittain, 1998).

Determination of peroxide value (PV)

1g of sample was added with 1g of KI in boiling test tube followed by adding 10mL of the solvent mixture (2:1 Glacial AA: Chloroform), reaction mixture was boiled in a water bath only for 30sec, and immediately mixture was transferred to the flask which already filled with 20 mL of 5% KI solution, the mixture was titrated against sodium thiosulfate solution by adding starch as an indicator, end point was observed when yellow colour completely disappeared. Same procedure was followed for the blank sample (Onukwuli et al., 2017). PV was calculated by the formula: -

$$PV \text{ (Meq/Kg)} = \frac{1000 \times N \times (S - B)}{W} \quad (7)$$

Where, B = titre value of thiosulfate solution for the blank, S= titre value of thiosulfate solution for the sample, W= mass of the sample.

Statistical analysis

All the experiments were done in triplicates and data were analyzed using SPSS 16.0 software. The means values were compared by the least significant difference (LSD) test at a significance level of $P \leq 0.05$. Equations were written using Microsoft Equation 3.0.

RESULTS AND DISCUSSION

Characterization of Camelina oil

The observed oil percentage from *Camelina sativa* seeds was 37.796 (± 0.566) with a clear yellow appearance. The *C. sativa* is a short seasoned biennial herb, so this oil yield made it a worthy feedstock for biodiesel production. Since the AV and FFA % were higher, oil cannot be used directly for TE's reaction (Table 1). To reduce these values, the refining of the oil was necessary prior to the use of Camelina oil for biodiesel production.

Oil recovery and acid value (AV) reduction after deacidification

Deacidification or neutralization method was used to remove various non-glyceride contents from the Camelina oil, which are responsible for the deterioration of oil or act as a barrier during the conversion of oil into biodiesel. For removing such substances from the Camelina oil, an adsorption (Physisorption) method was applied.

Four different oil: SG ratios (3:1, 6:1, 9:1 and 12:1) were used for the deacidification. The highest AV, FFA% and density were reduced when the 3:1 ratio was applied (Fig. 2). However, the recovered oil percentage was lower than the other trials in the case of 3:1 (Figure 3). The recovered oil percentage was

Table 1. Physicochemical properties of Camelina seed oil.

Characteristics	Unit	Findings
Colour	-	Yellow liquid
Odor	-	Agreeable
Oil Yield	(%)	37.796 (± 0.566)
Moisture	(%)	0.038 (± 0.0026)
Density	g/cm ³	0.921 (± 0.0028)
RI	-	1.423 (± 0.0011)
AV	mg KOH/g	6.453 (± 0.075)
FFA	(%)	3.226 (± 0.375)
SV	mg KOH/g	181.36 (± 0.468)
IV	gl ₂ /100g	157.12 (± 1.343)

Each Value expressed as mean, \pm S. D. (n=3)

highest when the 12:1 ratio was applied (87.91%), but the acid value was not much reduced in this case. Results concluded that considering all the parameters, 9:1 proportion was obviously better because it involved less quantity of SG and high yield of oil, was recovered (82.92 %). AV and % FFA (2.78, 1.39%) were also much reduced using this proportion (Fig. 2 and 3). Results showed the efficiency of SG to trap the free fatty acids and non-glyceride substances present in the Camelina oil. The study also concluded that the deacidification of vegetable oil using SG was very simple and environmentally friendly compared to alkali or acid treatment in which excess of water is required.

Characterization of produced biodiesel

After completion of the whole process, the obtained CBD yield was 92.28%. Crude Camelina seed oil was dark yellow in colour and it was very viscous before any treatment. After deacidification, Deacidified *Camelina sativa* Oil (DCSO) colour became light yellow and after TE, oil colour became light brown. It primarily indicated that the reaction proceeded successfully. Furthermore, HPTLC imaging was also developed for all three different oils and it clearly showed the triglyceride (TG) and fatty acid methyl ester (FAME) component at different R_f values (Figure 4). FT IR of obtained trans esterify oil also confirmed that the reaction succeeded successfully. In the spectrum, several peaks occurred at a noticeable region (Figure 5). An intense band at 1747.51 cm⁻¹ showed the characteristic of aliphatic ester C=O bond (FAME; i.e. biodiesel) initially confirmed the formation of biodiesel. Stretching vibrations of CH₃, CH₂ and CH appeared at 2852.91 cm⁻¹, 2927.91 cm⁻¹ and 3006.16 cm⁻¹, whereas 723 cm⁻¹, 1173-1196 cm⁻¹ and 1356 cm⁻¹ showed the characteristic banding vibrations of these groups. A signal at 1434.8 cm⁻¹ showed the stretching vibration of (-OCH₃) methyl ester group.

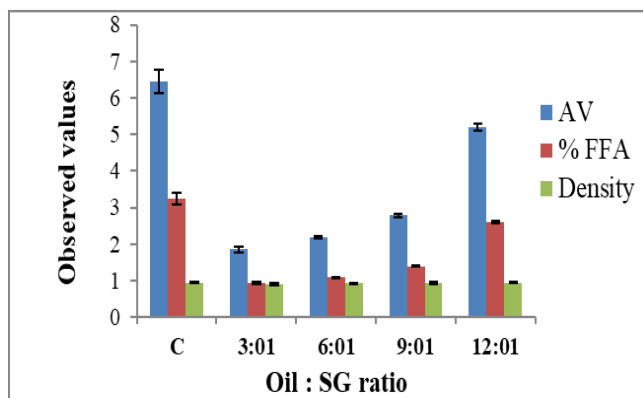


Fig. 2: Different parameters on applying SG: oil ratio.

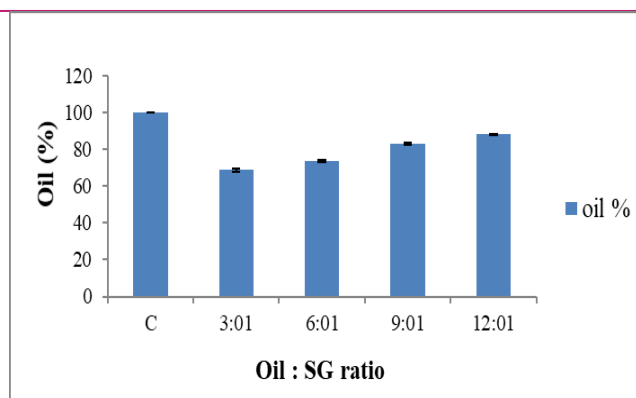


Fig. 3. Recovered oil percentage after deacidification treatment.

Table 2. Fatty acid composition of obtained biodiesel from Camelina oil.

Type	Fatty acid methyl esters					
	SI No.	Name	Carbon Chain	Mol. mass	R.T.	%
(SFA)	1.	Palmitic	17:0	270	18.51	7.28
	2.	Stearic	19:0	298	23.30	6.53
(MUFA)	1.	Elaidic	19:1	296	22.96	19.26
	2.	Eicosenoic	21:1	324	27.18	16.78
	3.	Erucic	23:1	352	31.35	6.35
	4.	Tetracosenoic	25:1	380	34.81	1.48
(PUFA)	1.	Linoleic	19:2	294	22.76	30.22
	2.	Nonanoic	21:3	352	30.46	2.13

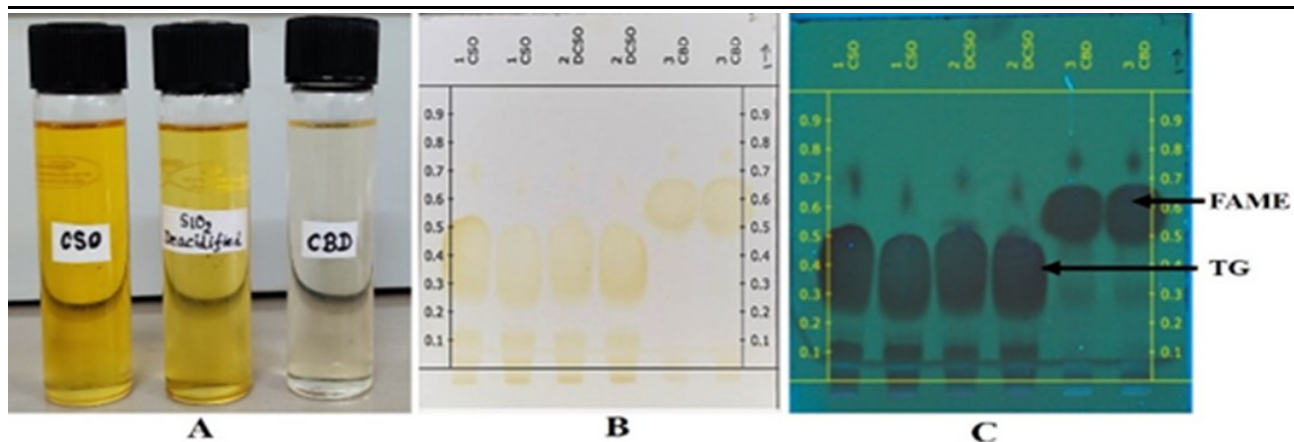


Fig. 4. A: Showing colour appearance of oils; B: - HPTLC image of the oil and BD in white light, C: - HPTLC image of the oil and BD at wavelength 254nm.

The fuel-specific properties of biodiesel solely depend upon its fatty acid constituents, and Camelina oil exhibits different fatty acid compositions at different climatic conditions and environment (Murphy, 2016). So, there was a need to know the fatty acid composition of the obtained biodiesel. In CBD, the number of MUFA and PUFA components is present in higher amounts compared to other oilseed crops such as *Jatropha curcas*, *Pongamia pinnatae*, *Heavea brasiliensis* and *Azadiracta indica* etc (King et al., 2009; Demirbas et al., 2016). Camelina produced biodiesel containing almost 66% of unsaturated fatty acids, as by the GC-MS graph shown in Figure 6. In terms of carbon

chain length, C-20 and it above chain length fatty acids were almost 26% (Table 2). Higher unsaturation of Camelina oil is a major drawback to make it a world-class feedstock for biodiesel production. However, the fatty acid composition can be reduced by the genetic modification to their seed varieties (Villanueva-Mejia et al., 2017).

Unsaturated fatty acids are less stable than saturated oils and the presence of double bond makes them more susceptible to rancidity. Rancidity is the oxidation of oil and the produced oxidative components deteriorate the chemical properties of the oil. However, these oxidations can be reduced by packaging the

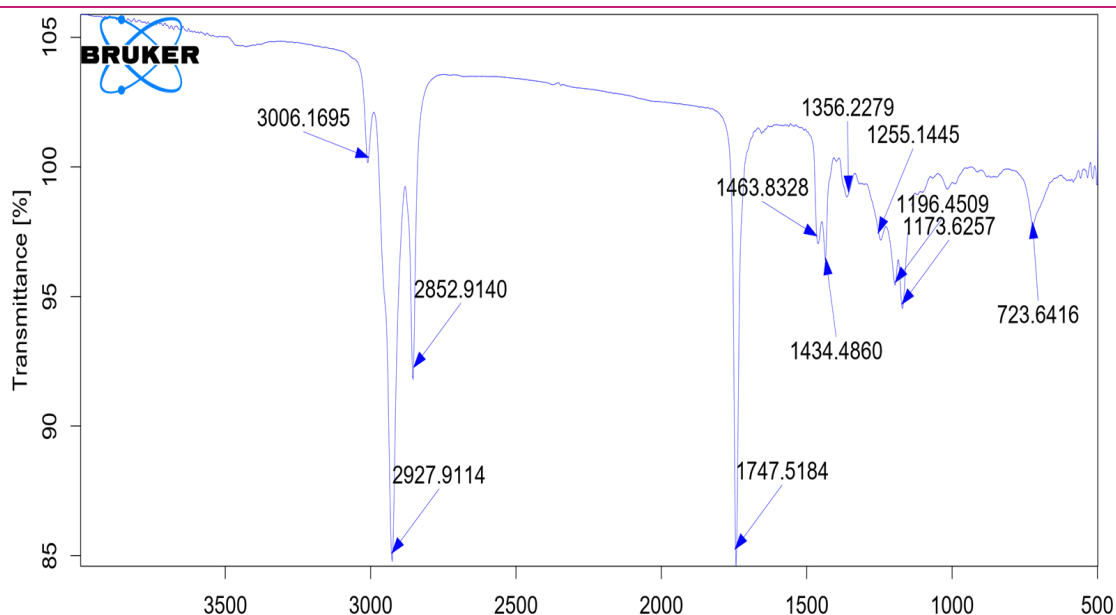


Fig. 4. FT-IR spectrum of produced biodiesel.

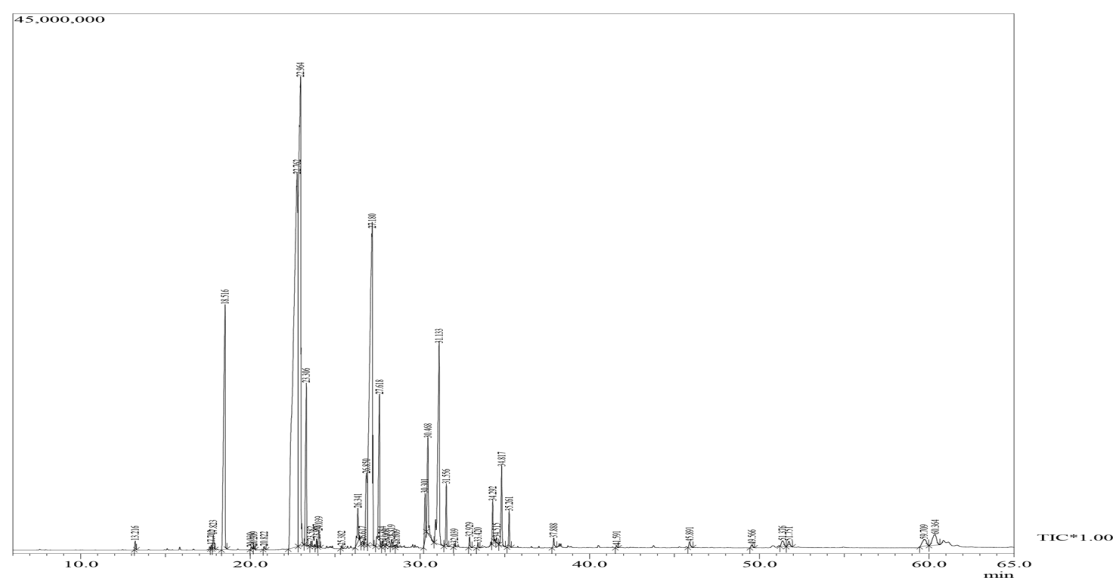


Fig. 5. GC-MS Chromatogram of produced biodiesel from Camelina seed oil.

biodiesel in airtight containers by providing oxygen-free atmosphere and adding antioxidants to the biodiesel. Rancidity of an oil is generally evaluated in terms of oxidation stability. It was also interesting to note that CBD exhibited a remarkable oxidation stability of about 6 h. All examined parameters are shown in Table 3.

The major characteristics, such as AV, FFA%, Sp. gravity and moisture contents were in the acceptable limits specified by the ASTM standards. After TE, obtained oil's saponification value was decreased up to 168.3. It indicated that triglyceride of CBD has high molecular mass of fatty acids than the CSO. The observed values of SV were favourable than SV values of other vegetable oils generally used for biodiesel production (Jibril *et al.*, 2012). Peroxide Value (PV) is the measure of hydro peroxide concentration present in

one kg of oil. PV for CBD was 13.28 Meq/Kg which was higher in comparison to the Jatropha produced BD, i.e. approximately 6 Meq/Kg reported by the other investigators (Akbar *et al.*, 2009). IV of biodiesel was 152 gI₂/100g which was higher than the specified limit of ASTM standards.

Oxidation stability (OS) of the obtained CBD was 6 hrs. which was higher than the minimum limit specified by ASTM (3 hrs.). But, still oxidation stability value was not much enough compared to other oilseed crops utilized as a feedstock for biodiesel production such as Jatropha, Sunflower, and Castor oil (Chaithongdee *et al.*, 2010; Chellappa *et al.*, 2019). However, having a high content of MUFA and PUFA this much oxidation stability was noticeable and it may be due to the presence of antioxidant components such as vitamin E

Table 3. Characterization of Camelina produced biodiesel and its comparison with the ASTM, 2000 standard limits.

S. No.	Properties	Test method	Unit	CS biodiesel	ASTM, 2000 D6751 Limits
1.	Yield Conversion	-	(%)	92.28	-
2.	Colour	-	-	Clear liquid	-
3.	Odor	-	-	Agreeable	-
4.	Moisture Content	IS 548	(%)	0.032	0.050 max
5.	Specific Gravity	-	-	0.873	0.88
6.	Refractive Index	-	-	1.33	-
7.	Acid Value	IS 548	Mg KOH/g	0.37	0.5
8.	FFA	IS 548	(%)	0.185	-
9.	Saponification Value	FSSAI	Mg KOH/g	168.3	-
10.	Ester Value	-	Mg/g	173.53	-
11.	Peroxide Value	IS 548	Meq/Kg	13.28	-
12.	Iodine Value	FSSAI	gI ₂ /100g	152	150 max
13.	Pour Point	ASTM, 2000 D97	°C	-7	-15 - 10
14.	Cloud Point	ASTM, 2000 D2500	°C	3	-3 - 12
15.	Gross Calorific Value	ASTM, 2000 D240	Cal/g	10745	-
16.	Sulphur Content	ASTM, 2000 D5185	PPM	24	15
17.	Flash Point	IP170	°C	126	120 min
18.	Water & sediments	ASTM, 2000 D1744	%(V/V)	0.02	-
19.	Oxidation Stability at 110°C	ASTM, 2000 D2274	Hours	6	3 min
20.	Distillation Recovery 95%	ASTM, 2000 D1160	°C	308	-
21.	Corrosion (Fe & Cu)	ASTM, 2000 D6595	PPM	NILL	-
22.	Carbon Residue	ASTM, 2000 D524	%(m/m)	0.023	0.3 (Max)
23.	Particle count & distribution	NAS 1638	NAS Class	4	-

and some phenolic acids. The sulphur content of the CBD (24 ppm) was higher than the ASTM limits (15 ppm). The higher sulphur content was reported in the CBD, because Camelina plant is from the *Brassicaceae* family, which contains glucosinolates (sulphur-containing glucosides) as a main bioactive component and also responsible for the pungent smell of mustard family's plants (Barba et al., 2016). All Other fuel-specific properties such as pour point, cloud point, flash point, particle count, water and sediments, and carbon residue were under the specified ASTM fuel specification limits.

Conclusion

The higher oil yield and conversion of oil to biodiesel percentage indicated that the Camelina plant could be utilized as a primary feedstock for biodiesel production. However, FAME profiling of Camelina exhibited a higher number of unsaturated fatty acids, which the genetic modifications can reduce. Silica Gel deacidification was the principal part of the current investigation as this technique is not utilized beforehand by any analyst for the refining procedure of the Camelina oil. SG showed its adequacy for

neutralizing the oil and high oil recovery was the additional advantage of this process. However, silica gel utilisation also needs some more research, including reaction time, temperature effects, and other such parameters. Yet, from this investigation, it can be concluded that this SG deacidification demonstrated positive outcomes in terms of recovered oil percentage, acid value reduction and density of the oil. Conversion of Camelina oil to Camelina biodiesel succeeded successfully. Besides sulphur content and Iodine Value (IV), all the ester and fuel-specific properties were very much satisfactory and met all the ASTM standard limits specified for biodiesel.

ACKNOWLEDGEMENTS

The authors are grateful to the Director, DIBER-DRDO, for providing logistic laboratory facilities. Thanks are also to HOD, Department of Chemistry, DSB Campus, Nainital for the financial aid provided by DRDO, New Delhi, India is duly acknowledged.

Conflict of interest

The authors declare that they have no conflict of interest.

REFERENCES

- AOCS (2004). Official methods and recommended practices of the American Oil Chemists' Society. Champaign, USA: AOCS Publishing.
- Akbar, E., Yaakob, Z., Kamarudin, S. K., Ismail, M., and Salimon, J. (2009). Characteristic and composition of *Jatropha curcas* oil seed from Malaysia and its potential as biodiesel feedstock. *Eur. J. Sci. Res.*, 29(3), 396-403. <http://citeseerx.ist.psu.edu/viewdoc/download?doi=10.1.1.1076.5372&rep=rep1&type=pdf>
- ASTM D. (2002). 6751-02, Standard Specification for Biodiesel Fuel (B100) Blend Stock for Distillate Fuels. *Annual Book of ASTM, 2000 Standards*. Accessed July 2020. https://afdc.energy.gov/fuels/biodiesel_specifications.html
- Barba, F. J., Nikmaram, N., Roohinejad, S., Khelfa, A., Zhu, Z., and Koubaa, M. (2016). Bioavailability of glucosinolates and their breakdown products: impact of processing. *Front. Nutr.*, 3, 24. <https://doi.org/10.3389/fnut.2016.00024>
- Barabas, E. S., and Brittain, H. G. (1998). Povidone-iodine. *Analytical profiles of drug substances and excipients*, 25, 341-462. <https://www.sciencedirect.com/book-series/analytical-profiles-of-drug-substances-and-excipients/vol/25/suppl/C>
- Barret, R. (2018). Importance and Evaluation of Lipophilicity. In: R. Barret *Therapeutic Chemistry*, pp. 53–78. Elsevier (2018). http://scholar.google.com/scholar_lookup?hl=en&publication_year=2018&author=R.+Barret&title=Therapeutic+Chemistry
- Berti, M., Gesch, R., Eynck, C., Anderson, J., and Cermak, S. (2016). Camelina uses, genetics, genomics, production, and management. *Ind Crops Prod.*, 94, 690-710. DOI: 10.1016/j.indcrop.2016.09.034
- Biofuel Policy. (2018). Biofuels. National Policy on Biofuels-2018 retrieved from <http://petroleum.nic.in/sites/default/files/biofuels.pdf>
- Chaithongdee, D., Chutmanop, J., & Srinophakun, P. (2010). Effect of antioxidants and additives on the oxidation stability of *jatropha* biodiesel. *Agric. Nat. Resour.* 44 (2), 243-250. <https://li01.tci-thaijo.org/index.php/anres/article/view/244911/167382>
- Chellappa, T., Santa Rosa, J. G., Santos, D. L., Bouffleur, R. N., Paiva, I. V., Lèger, T., ... & Nascimento, R. M. (2019). Oxidative stability of blended sunflower and castor biodiesel by Rancimat and static mode P-DSC. *Energy Sources, Part A: Recovery, Utilization, and Environmental Effects*, 1-10. <https://doi.org/10.1080/15567036.2019.1678697>
- Christy, A. A. (2012). Effect of heat on the adsorption properties of silica gel. *Int. J. Eng. Technol.*, 4(4), 484-488. <https://uia.brage.unit.no/uia-xmlui/handle/11250/136897>
- Dalei, N. N., Roy, H., & Gupta, A. (2017). Crude oil import of India from its major oil trade partner countries: An empirical evidence using panel data analysis. *Int. j. adv. res. dev.* 2(6), 726-735.
- Demirbas, A., Bafail, A., Ahmad, W., and Sheikh, M. (2016). Biodiesel production from non-edible plant oils. *Energy Explor. Exploit.*, 34(2), 290–318. <https://doi.org/10.1177/0144598716630166>
- Jibril, M., Joel, A. S., Edith, U., and Audu, A. A. (2012). Production and characterization of biodiesel from *jatropha* oil and neem oil. *IJETED* 2(2), 313-320. https://scholar.google.com/scholar?hl=en&as_sdt=0%2C5&q=Production+and+Characterization+of+Biodiesel+from+Jatropha+Oil+and+Neem+Oil&btnG=
- Kumar, K., and Pathak, R. (2016). Phytochemical analysis and assessment of in vitro antibacterial activity of non-polar solvent based *Camelina* seed extracts. *Indian J. Plant Physiol.*, 21(3), 255-262. <https://doi.org/10.1007/s40502-016-0223-6>
- King, A. J., He, W., Cuevas, J. A., Freudenberger, M., Ramiaramananana, D., and Graham, I. A. (2009). Potential of *Jatropha curcas* as a source of renewable oil and animal feed. *J. Exp. Bot.*, 60(10), 2897-2905. <https://doi.org/10.1093/jxb/erp025>
- Mamat, R., Sani, M. S. M., Sudhakar, K., Kadarohman, A., & Sardjono, R. E. (2019). An overview of Higher alcohol and biodiesel as alternative fuels in engines. *Energy Reports*, 5, 467-479. <https://doi.org/10.1016/j.egyr.2019.04.009>
- Murphy, E. J. (2016). *Camelina (Camelina sativa)*. In *Ind Crop Prod.* (pp. 207-230). <https://doi.org/10.1016/B978-1-893997-98-1.00008-7>
- Onukwuli, D. O., Emembolu, L. N., Ude, C. N., Aliozo, S. O., and Menkiti, M. C. (2017). Optimization of biodiesel production from refined cotton seed oil and its characterization. *Egypt. J. Pet.*, 26(1), 103-110. <https://doi.org/10.1016/j.ejpe.2016.02.001>
- Pandey, V. C., Singh, K., Singh, J. S., Kumar, A., Singh, B., and Singh, R. P. (2012). *Jatropha curcas*: A potential biofuel plant for sustainable environmental development. *Renew. Sust. Energ. Rev.*, 16(5), 2870-2883. <https://doi.org/10.1016/j.rser.2012.02.004>
- Pinzi, S., Leiva, D., Lopez-Garcia, I., Redel-Macias, M. D., and Dorado, M. P. (2014). Latest trends in feedstocks for biodiesel production. *Biofuel Bioprod Biorefin.* 8(1), 126-143. <https://doi.org/10.1002/bbb.1435>
- Richard Fleenor, (2011). USDA NRCS Plant Materials Program, Spokane WA. (Accessed on December, 2020). https://plants.usda.gov/plantguide/pdf/pg_casa2.pdf
- Sbesta (2020). Profiling the world's top five countries in electricity consumption. <https://www.nsenegybu-siness.com/features/electricity-consuming-countries/>
- Villanueva-Mejia, D., & Alvarez, J. C. (2017). Genetic improvement of oilseed crops using modern biotechnology. *Advances in seed biology. Web of Science™ Core Collection (BKCI)*, 295-317.
- Wang, D., Zhang, J., Yang, Q., Li, N., and Sumathy, K. (2014). Study of adsorption characteristics in silica gel-water adsorption refrigeration. *Appl. Energy*, 113, 734-741. DOI: 10.1016/j.rser.2013.09.023
- Zaliha, O., Chong, C. L., Cheow, C. S., Norizzah, A. R., & Kellens, M. J. (2004). Crystallization properties of palm oil by dry fractionation. *Food Chem.*, 86(2), 245-250. <https://doi.org/10.1016/j.foodchem.2003.09.032>